


# MONITOUCH

## V10 Replacement Guidance [V6 series]

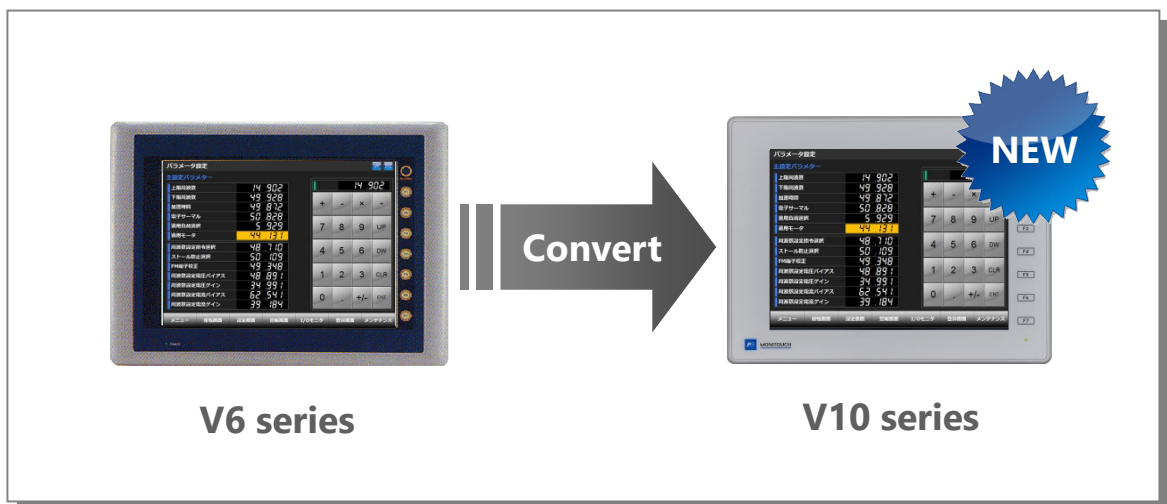

[- List of Recommended Replacement Models](#)    [Page 2](#)

[- Configuration Software](#)                      [Page 6](#)

[- Screen Program Conversion](#)                [Page 6](#)



- V612/V610S → V10 Standard




V612T  
V612C



V610S



V1012iS



V1010iS

Hardware Specifications

Item		V612/V610S
Dimensions W x H x D (mm)	12.1-inch	334.0 x 270.0 x 95.8
	10.4-inch	310.0 x 240.0 x 92.3
Panel cut-out W x H (mm)	12.1-inch	313.0(+0.5/-0) x 246.2(+0.5/-0)
	10.4-inch	289.0(+0.5/-0) x 216.2(+0.5/-0)
Display device		TFT color/STN color
Display colors		128 colors
Resolution		800 x 600 dots
Touch switch		Analog resistance film Matrix resistance film
Communication I/F	Serial	D-Sub 25-pin x1 : RS-232C / RS-422/485 Modular 8-pin x2 : RS-232C / RS-485
	Network	Communication unit: CU-xx
Video		4 CH *4
External storage device		Dedicated memory card *5

V10 Standard
327.8 x 261.0 x 53.4
303.8 x 231.0 x 53.8
Same as on the left
TFT color
16.7 million colors *1
Same as on the left
Analog resistance film *2
D-Sub 9-pin x1 : RS-232C / RS-422/485 *3 Modular 8-pin x2 : RS-232C / RS-485
Communication unit: CUR-xx
Under development Scheduled to be released in spring 2025.
SD/SDHC/SDXC card USB flash drive

\*1 Only for displaying "picture" images, 3D parts, video / RGB input images and remote desktop window. All other content is displayed using 65,536 colors.  
 \*2 It is not possible to press two points on the screen at the same time on V10. For two-point press, change the setting to use both a switch on the screen and a function switch.  
 \*3 When using the existing cable, use Hakko Electronics' conversion cable "D9-D25". When Hakko Electronics' optional unit "TC485" was used, use "TC-D9".  
 \*4 Only for V612xx1, V610xx1  
 \*5 When using V612x2, V610x2 or Hakko Electronics' optional unit "CREC".

- V610Tx1/V610Tx2 → V10 Standard

The optional Video/RGB unit of V10 is scheduled to be released in spring 2025.

When using V610Tx1 to display video or using V610Tx2 to display RGB input, replace with V1010iS.

The screen resolution differs between V610T and V1010iS.

V610T: 640 x 480 → V1010iS: 800 x 600 dots

When converting the screen program from V6 to V10, use automatic resizing feature of V-SFT. If the layout is changed, adjust it manually.



V610Tx1  
V610Tx2



V1010iS

+ Optional unit  
Under development

Hardware Specifications

Item		V610Tx1	V610Tx2	V10 Standard
Dimensions W x H x D (mm)		310.0 x 240.0 x 92.3		303.8 x 231.0 x 53.8
Panel cut-out W x H (mm)		289.0(+0.5/-0) x 216.2(+0.5/-0)		Same as on the left
Display device		TFT color		Same as on the left
Display colors		128 colors		16.7 million colors *1
Resolution		640 x 480 dots		800 x 600 dots *2
Touch switch		Analog resistance film Matrix resistance film		Analog resistance film *3
Communi- cation I/F	Serial	D-Sub 25-pin x1 : RS-232C / RS-422/485 Modular 8-pin x2 : RS-232C / RS-485		D-Sub 9-pin x1 : RS-232C / RS-422/485 *4 Modular 8-pin x2 : RS-232C / RS-485
	Network	Communication unit: CU-xx		Communication unit: CUR-xx
Video		4CH	-	Under development Scheduled to be released in spring 2025.
RGB		-	1CH	Under development Scheduled to be released in spring 2025.
External storage device		Dedicated memory card *5		SD/SDHC/SDXC card USB flash drive

\*1 Only for displaying "picture" images, 3D parts, video / RGB input images and remote desktop window. All other content is displayed using 65,536 colors.

\*2 The resolution is SVGA. When converting the screen program, use automatic resizing feature of V-SFT. If the layout is changed, adjust it manually.

\*3 It is not possible to press two points on the screen at the same time on V10. For two-point press, change the setting to use both a switch on the screen and a function switch.

\*4 When using the existing cable, use Hako Electronics' conversion cable "D9-D25". When Hako Electronics' optional unit "TC485" was used, use "TC-D9".

\*5 When using V610T21, V610T22 or Hako Electronics' optional unit "CREC".

## - V610Tx0/V610C/V608C → V10 Standard

The screen resolution differs between V610Tx0/V610C/V608C and V10 Standard.  
 V6: 640 x 480 → V10: 800 x 600 dots

If the same resolution model is required, use the V9 Lite model.

When converting the screen program from V6 to V10, use automatic resizing feature of V-SFT. If the layout is changed, adjust it manually.

### Recommended Replacement Models

Size	V6 model		V10 model	
			Light gray	Black
10.4-inch VGA	V610Tx0	V610Tx0M *1	V1010iS	V1010iSB
	V610Cx0	V610Cx0M *1		
	V610Tx0D	V610Tx0MD *1	V1010iSD	V1010iSBD
	V610Cx0D	V610Cx0MD *1		
7.7-inch VGA	V608C10	-	V1008iSD	V1008iSBD

\*1 The "M" in the model number means matrix resistance film model. The touch switches have been changed to analog resistance film in V10.



V610Tx0  
V610C



V608C



V1010iS



V1008iS

### Hardware Specifications

Item		V6	V10 Standard
Dimensions W x H x D (mm)	10.4-inch	310.0 x 240.0 x 92.3	303.8 x 231.0 x 53.8
	7.7-inch	230.0 x 175.0 x 66.1	235.0 x 180.0 x 48.7
Panel cut-out W x H (mm)	10.4-inch	289.0(+0.5/-0) x 216.2(+0.5/-0)	Same as on the left
	7.7-inch	220.5(+0.5/-0) x 165.5(+0.5/-0)	
Display device		TFT color/STN color	TFT color
Display colors		128 colors	16.7 million colors *1
Resolution		640 x 480 dots	800 x 600 dots *2
Touch switch		Analog resistance film Matrix resistance film	Analog resistance film *3
Communi- cation I/F	Serial	D-Sub 25-pin x1 : RS-232C / RS-422/485 Modular 8-in x2 : RS-232C / RS-485	D-Sub9-pin x1 : RS-232C / RS-422/485 *4 Modular 8-pin x2 : RS-232C / RS-485
	Network	Communication unit: CU-xx	Communication unit: CUR-xx
External storage device		Dedicated memory card *5	SD/SDHC/SDXC card USB flash drive

\*1 Only for displaying "picture" images, 3D parts, video / RGB input images and remote desktop window. All other content is displayed using 65,536 colors.

\*2 The resolution is SVGA. When converting the screen program, use automatic resizing feature of V-SFT. If the layout is changed, adjust it manually.

\*3 It is not possible to press two points on the screen at the same time on V10. For two-point press, change the setting to use both a switch on the screen and a function switch.

\*4 When using the existing cable, use Hako Electronics' conversion cable "D9-D25". When Hako Electronics' optional unit "TC485" was used, use "TC-D9".

\*5 When using V610x2 or Hako Electronics' optional unit "CREC".

## - Configuration Software

Model	Software	OS	Transferring cable *1
V6	V-SFT-5	Windows Vista (32bit, 64bit) Windows 7 (32bit, 64bit) Windows 8 (32bit, 64bit)	- LAN cable *2 - V-CP (MJ to Dsub9) manufactured by Hakko Electronics Co., Ltd.
V10	V-SFT-6 Supported with version 6.2.0.0 or later	Windows 8.1 (32bit, 64bit) Windows 10 (32bit, 64bit) Windows 11(64bit)	- USB cable (USB mini-B to USB-A) - LAN cable *3 - V-CP (MJ to Dsub9) manufactured by Hakko Electronics Co., Ltd.

\*1 The screen program can be transferred via SD card/USB flash drive when using V10 and dedicated memory card when using V6.

\*2 Available when CU-03 is installed on the V6 unit.



\*3 LAN connector of V10 supports Auto-MDIX. Straight/crossover cables can be used with or without HUB.

## - Screen Program Conversion



The screen program can be converted from V6 to V10 using V-SFT-6 (configuration software for V series).

### - Conversion procedures


1. Start V-SFT and click [Open] in the Startup menu or [Open] in the [File] menu. The screen program file can also be opened by dragging it onto V-SFT-6. If using this method, proceed to step 4.
2. Change the file extension to [\*.V6] in the [Open] dialog.

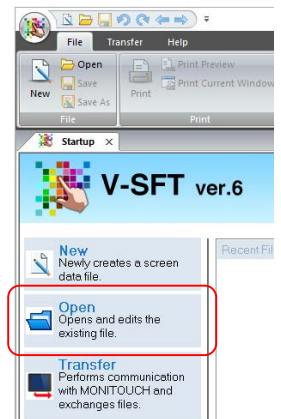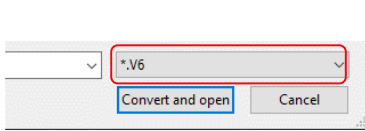


3. Select the V6 series screen program file and click [Convert and open]. The [Edit Model Selection] dialog appears.
4. Select the V10 series model and click [OK].

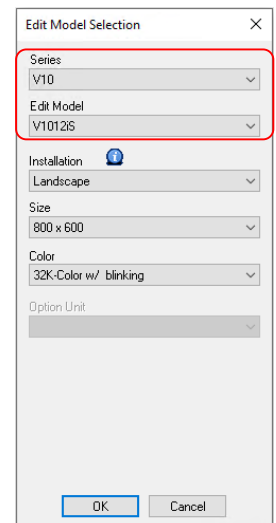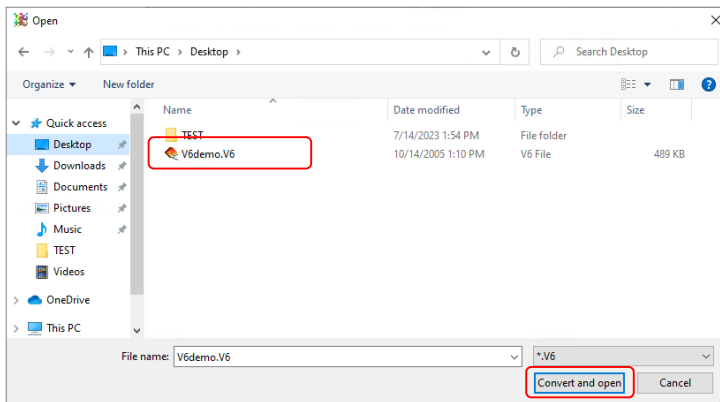

- The dialog on the right may be displayed.  
When connecting to a printer : Click [Yes]  
When not connecting to a printer : Click [No]

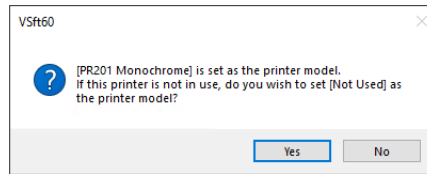


- The dialog on the right may be displayed.  
Click [Yes].

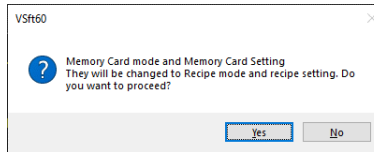

\* The data conversion in the storage device is required. Refer to the Memory Card Mode Conversion Manual.


- When converting the program with different resolution, the dialog shown to the right will appear.  
When enlarging parts: Click [Yes]  
When not enlarging parts: Click [No]

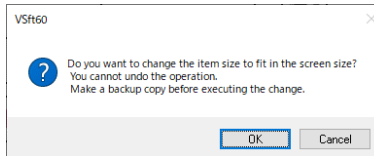

\* If the layout is changed, adjust it manually.


- The following dialog may be displayed.  
Click [Yes] to display the error check window and check the functions and setting which are not available.  
Check [solution] and modify it.

If the same warning message appears even in the V6 screen program before conversion, the warning does not affect the program and you can use it without modification.



Error Check				
		0 Error	2 Warning	
Category	Location	Explanation	Solution	
Warning	Overlap Library [7]	Normal Overlap	Overlap larger than the screen is created.	Set the overlap
Warning	Overlap Library [8]	Normal Overlap	Overlap larger than the screen is created.	Set the overlap

- The screen program converted to V10 series is displayed on V-SFT. Name and save the file.

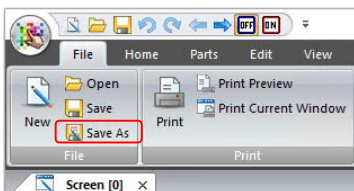

**The converted V10 screen program cannot be converted back to the V6 screen program. Confirm the operation with the V10 series unit before use.**